

# D27GBH

## Tri-band Wi-Fi 7 Extender


### Description

The D27GBH Wi-Fi 7 Extender is part of Altice Labs' portfolio and the ideal solution for those who want to ensure optimal coverage and consistent Wi-Fi performance within indoor scenarios. As a component of Altice Labs' Smart Mesh Wi-Fi solution, this device interoperates seamlessly as a mesh solution compliant with Wi-Fi EasyMesh™ from Wi-Fi Alliance®, granting optimal QoS and maximizing throughput performance. The equipment can be easily installed and managed through our mobile application (Android & iOS) and cloud-based web portal.

This device's architecture allows wireless and wireline connections to link Fiber Gateways and

Extenders. Two built-in RJ-45 Ethernet interfaces for cable connections grant ultra-fast Wi-Fi access for Internet applications. A valuable set of built-in LEDs provides fast and pertinent information to the user.

This equipment includes a high-performance Wi-Fi technology that supports tri-band concurrent operation, complying with 802.11a/b/g/n/ax/be standards, operating simultaneously on the 2.4GHz, 5GHz and 6GHz frequency bands. This ultimate and low-power consumption device also delivers embedded IoT interfacing complying with Thread, Bluetooth, Zigbee and Matter interfaces.

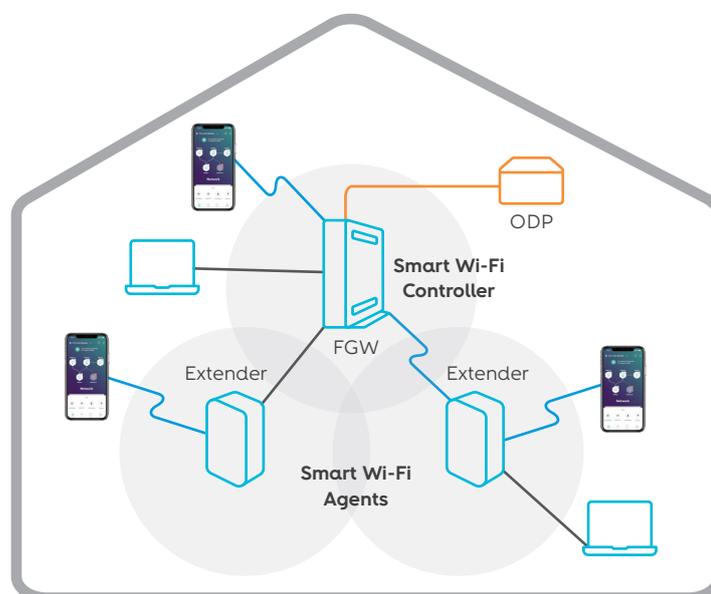

# D27GBH

Tri-band Wi-Fi 7 Extender

## Features

- Compliant with Wi-Fi® Alliance EasyMesh™ Multi-AP specification;
- Tri-band Wi-Fi 7 compliance;
- Optimal QoS and throughput performance;
- Explores IoT business opportunities by exposing Bluetooth, Thread, Zigbee and Matter standardized interfaces;
- Wireless and wireline connections to link FGWs and Extenders.

## Product Specifications

|  |   |
|--|---|
| <b>Antenna Configuration</b>               | Tri-band concurrent 2x2 (2.4GHz) + 4x4 (5GHz) + 4x4 (6GHz)                                |
| <b>Transmit power</b>                      | Max EIRP 2.4 GHz up to +20dBm<br>Max EIRP 5GHz up to +30dBm<br>Max EIRP 6GHz up to +26dBm |
| <b>Wi-Fi Support</b>                       | 802.11b/g/n/ax/be @ 2.4GHz + 802.11a/n/ac/ax/be @ 5GHz + 802.11ax/be @ 6GHz               |
| <b>Security / Encryption</b>               | WPA, WPA2, WPA3, WPS  |
| <b>Thread</b>                              | Open source mesh network IP-based protocol  |
| <b>Matter</b>                              | Open source IP-based connectivity standard  |
| <b>Bluetooth Low Energy</b>                | Point-to-point, broadcast and mesh topologies   |
| <b>Zigbee</b>                              | IoT   |
| <b>Multi-AP Wi-Fi Alliance® Compliance</b> | EasyMesh™ Wi-Fi Alliance® multiple AP specification                                       |
| <b>Mobile App Management</b>               | Yes   |
| <b>Cloud-Based Remote Management</b>       | Yes   |
| <b>Environment</b>                         | Temperature Range: +5°C to +40°C<br>Relative Humidity: 5% to 95%                          |
| <b>EMC</b>                                 | ETSI EN 301489-1 and EN 301489-17   |
| <b>Safety</b>                              | IEC/EN 62368-1  |
| <b>Radio</b>                               | ETSI 300 328 and EN 301893  |
| <b>Ethernet</b>                            | 1x10/100/1000Base-T and 1x1/2.5GBase-T  |
| <b>Physical Buttons</b>                    | Power (ON/OFF); Reset (CPU); WPS  |
| <b>LEDs</b>                                | Power; Wi-Fi status; WPS; Ethernet Link/Activity  |
| <b>Equipment Size (HxWxD)</b>              | 168 x 70 x 168mm / 6.6 x 2.8 x 6.6"   |
| <b>Net Weight</b>                          | 500g / 1.10lb   |
| <b>Power Supply</b>                        | Primary: 230VAC, 50Hz or 115VAC, 60Hz<br>Secondary: 12VDC/2A ± 15%                        |

